




**ATLANTIC
LIGHTING**

PL Retro-Fit Kit

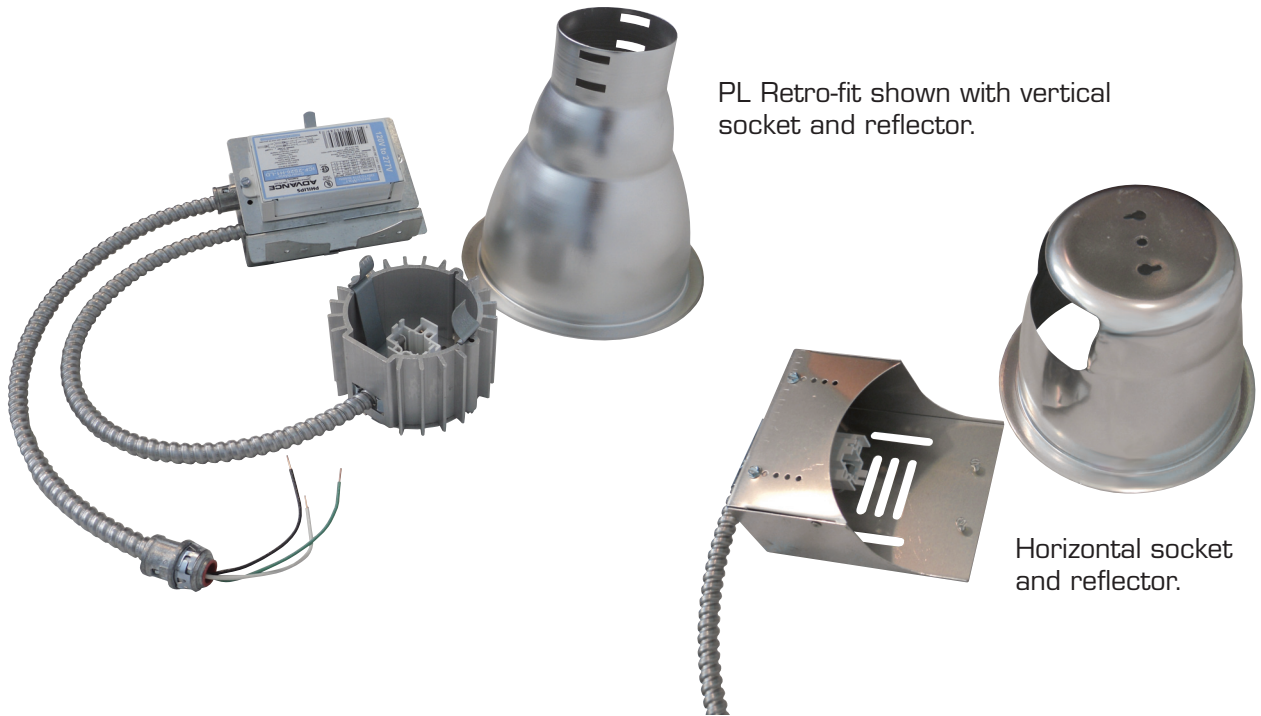

PL Retro-fit shown with vertical socket and reflector.

Horizontal socket and reflector.

The Atlantic Lighting PL Retro-Fit kit is used to convert an existing fixture to vertical or horizontal PL. The kit includes:

- Remote mount junction box that has; a ballast, a whip to connect to the existing junction box, and a whip and socket to connect to the new reflector.
- New reflector
- (4) Retro-fit clips

The PL Retro-fit is easy to wire and quickly converts the existing fixture. Installation and security of the reflector depends on the existing housing and the Electrician. Atlantic will supply "L" retro-fit clips for existing frames with a collar, or "S" retro-fit clips for flat pan type housings as shown to the right. Clips should be modified on-site so that the reflector is securely held into the ceiling or site supplied means of assembly would be required.

Specify the Atlantic frame that you would use if it were a new construction along with the designation RETRO. For example if you want an 8" vertical 1x42 retro-fit with the "L" clips, specify: A85142E1/2-RETRO-L-861OCL

Conversion kits can be supplied to convert an existing fixture to PL, utilizing the existing reflector. A sample of the socket and reflector are needed to develop a custom conversion kit.



"L" Clip



"S" Clip

231 Commerce Drive Fall River, MA 02720

Phone: (508) 678-5411 Fax: (508) 678-5408 www.atlantic-lighting.com