

Vertical Compact Fluorescent Installation Instructions

Reflector Kit Installation

- 1) Take the socket cup housing that is attached to the junction box by a flex conduit (**Figure A**) and slide the socket cup into the reflector neck holding the two spring clips that protrude from the cup and secure them to the neck slots of the reflector. (**Figure B**)

Warning - Power Must be off before energizing or relamping fixture.

- 2) Next insert the lamp before energizing to avoid ballast damage. Once that is done push the reflector in through the ceiling cutout so that the four positioned roto clips bite the reflector securing it from falling out. (**Figure C**)

Fixture Maintenance Instructions

- 1) Replace lamps every 8000 hours or when needed.
- 2) Clean Reflector with a damp cloth.

End-of-Life Circuit

All CFL and twin tube electronic ballasts have a standard end-of-life circuit which reduces overheating of broken lamp cathodes and minimizes potential of lamp melting or cracking.

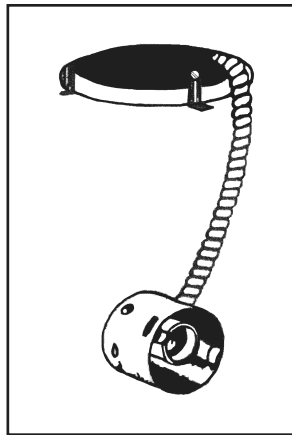


Figure A

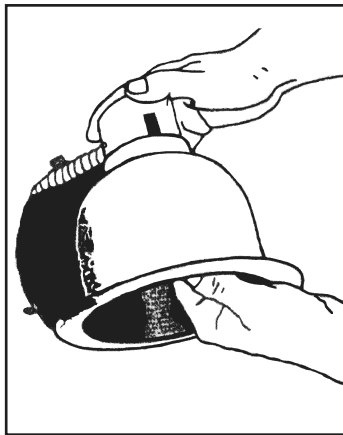


Figure B

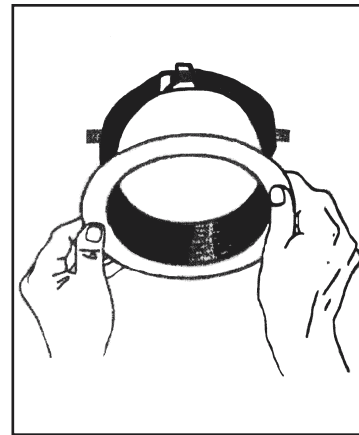


Figure C

QUAD TUBE LAMPS

26WATT POSITION

18WATT POSITION


13WATT POSITION

TRIPLE TUBE LAMPS

42WATT POSITION

32WATT POSITION

26WATT POSITION



7" and 8" Lamp Positioning