

Relamping Instructions for Quartz T4

STEP 1

Remove the safty lens holder from the aperture by gently holding the flange and pulling the holder from the aperture hole as shown in **FIGURE A**.

STEP 2

The lens holder is secured to the fixture by a safety chain which is installed from the factory. Let the lens holder hang while in the relamping process.

STEP 3

Reach up into the housing unscrew the T4 lamp and replace accordingly.
Replace all equipment/fixture covers to prevent personal injury or property damage.

NOTES:

Fixture MUST be installed by a qualified electrician.


To avoid electric shock, turn off power before attempting replacement.

To avoid skin burns, wait for bulb to cool before handling.

Do not use lamp if it is scratched, cracked or damaged in any way.

To avoid damaging the glass, DO NOT touch lamp with bare hands.

(Hold with clean cloth or tissue when installing. If touched, wipe off fingerprints before lighting.)

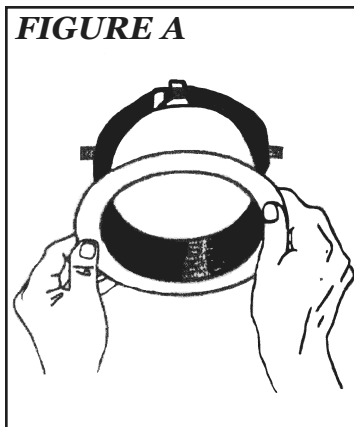

Quartz T4 Safty Mesh Holder