

PHOTOMETRICS

Luminaire Information

Product Number: A85132E1/2 / 8610CL


Frame: 8" Vertical Triple Tube Compact Fluorescent Open Luminaire

Reflector: 8" Vertical Specular Clear "Alzak®" Reflector

Ceiling Type: Direct Efficiency: 52.8% Lamp(s): (1) 32W 4 Pin GX24Q - 1 Base

Lumens: 2400 LTL Test Number: 06125

Cone Of Light



Zonal Lumen Summary

Zone	Lumens	% Lamp
0-30	795	33.1
0-40	1124	46.8
0-60	1268	52.8
0-90	1268	52.8
90-180	0	0.0
0-180	1268	52.8


Reflector Multipliers

Reflector Finish	Multiplier
Specular Wheat	.97
Specular Black	.70
Specular Pewter	.96
Matte White	.95

Coefficients Of Utilization

RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	63	63	63	63	61	61	61	61	59	59	59	56	56	56	54	54	54	53	53	53	53
1	60	59	57	56	59	58	56	55	55	54	54	53	53	52	52	51	51	50	50	50	50
2	57	55	53	51	56	54	52	50	52	50	49	50	49	48	49	48	47	46	46	46	46
3	54	51	48	46	53	50	48	46	49	47	45	48	46	44	46	45	44	43	43	43	43
4	51	47	44	42	50	47	44	42	46	43	41	45	43	41	44	42	41	40	40	40	40
5	49	44	41	39	48	44	41	38	43	40	38	42	40	38	41	39	37	37	37	37	37
6	46	41	38	36	45	41	38	36	40	37	35	39	37	35	39	37	35	34	34	34	34
7	44	39	35	33	43	38	35	33	38	35	33	37	34	33	36	34	32	32	32	32	32
8	41	36	32	30	40	35	32	30	35	32	30	34	32	30	34	31	30	29	29	29	29
9	38	33	30	27	38	33	30	27	32	29	27	32	29	27	31	29	27	26	26	26	26
10	36	31	27	25	35	30	27	25	30	27	25	29	27	25	29	27	25	24	24	24	24

Effective Floor Cavity Reflectance: 0.20

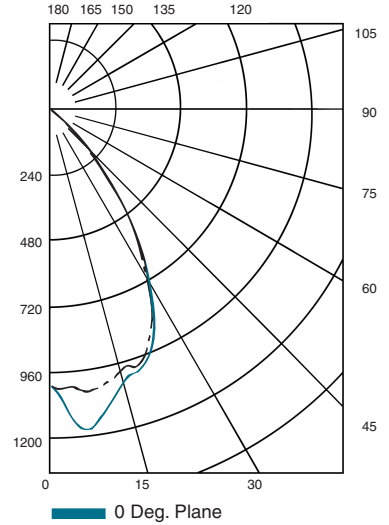

Luminaire Information

Product Number: A85142E1/2 / 8610CL


Frame: 8" Vertical Triple Tube Compact Fluorescent Open Luminaire

Reflector: 8" Vertical Specular Clear "Alzak®" Reflector

Ceiling Type: Direct Efficiency: 42.3% Lamp(s): (1) 42W 4 Pin GX24Q - 1 Base

Lumens: 3200 LTL Test Number: 06126

Cone Of Light



Zonal Lumen Summary

Zone	Lumens	% Lamp
0-30	921	28.8
0-40	1235	38.6
0-60	1353	42.3
0-90	1353	42.3
90-180	0	0.0
0-180	1353	42.3

Reflector Multipliers

Reflector Finish	Multiplier
Specular Wheat	.97
Specular Black	.70
Specular Pewter	.96
Matte White	.95

Coefficients Of Utilization

RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	50	50	50	50	49	49	49	49	47	47	47	45	45	45	43	43	43	42	42	42	42
1	48	47	46	45	47	46	45	44	44	44	43	43	42	42	41	41	41	40	40	40	40
2	46	44	42	41	45	43	42	41	42	41	40	41	40	39	39	39	38	37	37	37	37
3	44	41	39	38	43	41	39	37	39	38	37	38	37	36	38	36	36	35	35	35	35
4	42	38	36	34	41	38	36	34	37	35	34	36	35	33	35	34	33	32	32	32	32
5	39	36	34	32	39	36	33	32	35	33	31	34	32	31	33	32	31	30	30	30	30
6	38	34	31	30	37	34	31	30	33	31	29	32	31	29	32	30	29	28	28	28	28
7	36	32	29	28	35	31	29	27	31	29	27	30	29	27	30	28	27	26	26	26	26
8	34	30	27	25	33	29	27	25	29	27	25	28	26	25	28	26	25	24	24	24	24
9	32	27	25	23	31	27	25	23	27	25	23	26	24	23	26	24	23	22	22	22	22
10	30	26	23	21	29	25	23	21	25	23	21	25	23	21	24	22	21	21	21	21	21

Effective Floor Cavity Reflectance: 0.20

20.A

