

PHOTOMETRICS

Luminaire Information

Product Number: SV626WH1/2


Frame: 6" Vertical Quad Tube Compact Fluorescent Open Cylinder

Reflector: 6" Vertical Specular Clear "Alzak®" Reflector

Ceiling Type: Recessed **Efficiency:** 53.6% **Lamp(s):** (1) 26W 4 Pin G24Q - 3 Base

Lumens: 1800 **LTL Test Number:** 05657

Cone Of Light



Zonal Lumen Summary

Zone	Lumens	% Lamp
0-30	439	24.4
0-40	669	37.2
0-60	949	52.7
0-90	966	53.6
90-180	0	0.0
0-180	966	53.6


Reflector Multipliers

Reflector Finish	Multiplier
Specular Wheat	.97
Specular Black	.70
Specular Pewter	.96
Matte White	.95

Coefficients Of Utilization

RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	64	64	64	64	62	62	62	62	60	60	60	57	57	57	55	55	55	54			
1	60	59	57	56	59	58	56	55	55	54	53	53	53	52	52	51	50	49			
2	57	54	52	49	56	53	51	49	51	49	48	50	48	47	48	47	46	45			
3	53	50	46	44	52	49	46	44	47	45	43	46	44	42	45	43	42	41			
4	50	45	42	39	49	45	41	39	43	41	39	42	40	38	41	39	38	37			
5	47	41	38	35	46	41	37	35	40	37	35	39	36	34	38	36	34	33			
6	44	38	34	32	43	38	34	31	37	34	31	36	33	31	35	33	31	30			
7	41	35	31	28	40	34	31	28	34	30	28	33	30	28	32	30	28	27			
8	38	32	28	25	37	31	28	25	31	27	25	30	27	25	29	27	25	24			
9	35	29	25	22	34	28	25	22	28	25	22	27	24	22	27	24	22	21			
10	33	26	23	20	32	26	22	20	26	22	20	25	22	20	25	22	20	19			

Effective Floor Cavity Reflectance: 0.20

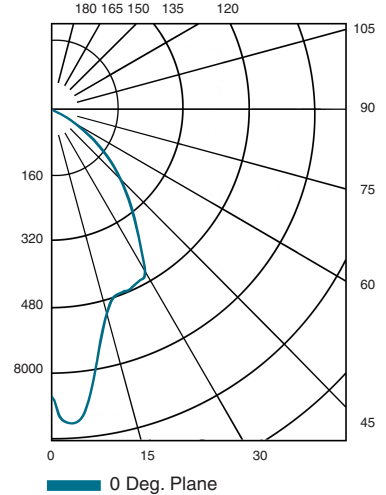

Luminaire Information


Product Number: SV632WH1/2

Frame: 6" Vertical Trip Tube Compact Fluorescent Open Cylinder

Reflector: 6" Vertical Specular Clear "Alzak®" Reflector

Ceiling Type: Recessed **Efficiency:** 54.8% **Lamp(s):** (1) 32W 4 Pin G24Q - 3 Base **Lumens:** 2400 **LTL Test Number:** 05814

Cone Of Light



Zonal Lumen Summary

Zone	Lumens	% Lamp
0-30	698	29.1
0-40	1047	43.6
0-60	1315	54.8
0-90	1315	54.8
90-180	0	0.0
0-180	1315	54.8

Reflector Multipliers

Reflector Finish	Multiplier
Specular Wheat	.97
Specular Black	.70
Specular Pewter	.96
Matte White	.95

Coefficients Of Utilization

RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	65	65	65	65	64	64	64	64	61	61	61	58	58	58	56	56	56	55			
1	62	60	59	58	61	59	58	57	57	56	55	55	54	54	53	53	52	51			
2	59	56	54	52	58	55	53	51	53	52	50	52	50	49	50	49	48	47			
3	56	52	49	47	54	51	48	46	50	47	46	48	46	45	47	46	44	43			
4	52	48	45	42	51	47	44	42	46	44	42	45	43	41	44	42	41	40			
5	49	44	41	38	48	44	41	38	43	40	38	42	39	37	41	39	37	36			
6	46	41	38	35	46	41	37	35	40	37	35	39	36	34	38	36	34	33			
7	44	38	34	32	43	38	34	32	37	34	32	36	33	31	36	33	31	30			
8	41	35	31	29	40	35	31	29	34	31	29	33	30	28	33	30	28	27			
9	38	32	28	26	37	32	28	26	31	28	26	31	28	26	30	27	25	25			
10	35	29	26	23	35	29	26	23	29	25	23	28	25	23	28	25	23	22			

Effective Floor Cavity Reflectance: 0.20

